

Dozer Blade – 6 Way






Features

- ❖ Six-way dozer blade with heavy-duty frame, 3/8" thick moldboard and adjustable skid shoes.
- ❖ Two-cylinder hydraulic angle and one-cylinder hydraulic tilt utilizing one electric valve and one loader valve.
- ❖ Corrosion, dent and flake resistant NitroSteel® cylinder rods made in the USA.
- ❖ 2 1/8" hinge and oscillation pins, replaceable Teflon® coated bushings provide lubrication at all pivot locations.
- ❖ 5/8" x 8" reversible, replaceable bolt-on wear edge.



BACK VIEW

Dozer Blade Specifications

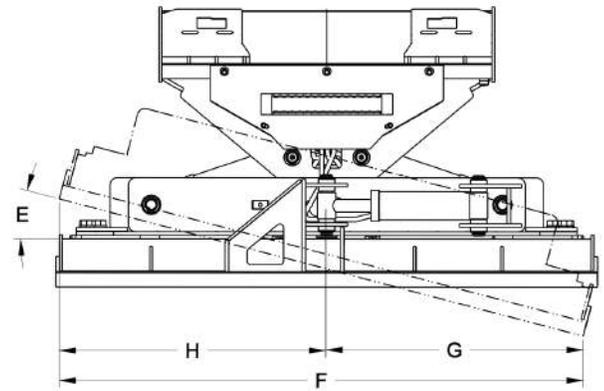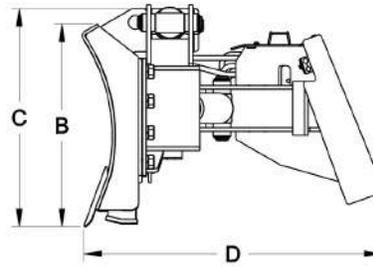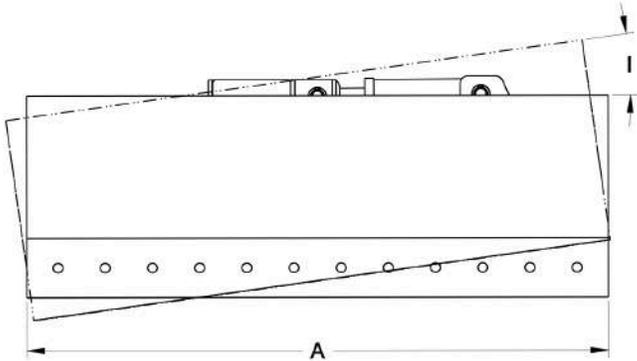

MODEL	DZR72	DZR84	DZR96
(A) Overall Blade Width (Inches)	74.0	86.0	98.0
(B) Blade Height (Inches)	25.8		
(C) Overall Height (Inches)	28.1		
(D) Overall Depth (Inches)	38.0		
(E) Blade Angle (Degrees)	+/- 30		
(F) Width at Full Angle (Inches)	64.1	74.5	84.9
(G) Center Line to Edge (Inches)	26.4	31.6	36.9
(H) Center Line to Edge (Inches)	37.7	42.9	48.0
(I) Blade Oscillation (Degrees)	+/- 10		
Moldboard Thickness (Inches)	0.375		
Cutting Edge (Inches)	5/8 x 8 Bolt-on		
Approximate Weight (Pounds)	1510	1575	1640
Recommended Loader Capacity (Pounds)	Greater than 1800		

Additional Info

- 3 1/2" bore, 8" stroke tilt and angle cylinders with 1 3/4" NitroSteel® cylinder rods and 1 9/16" cylinder pins.
- Hoses from blade to loader and couplers included.

Specifications and designs are subject to change without notice.



Virnig Manufacturing Inc.
 800-648-2408
 attachments@virnigmfg.com
 www.virnigmfg.com