

Skeleton Rock Grapple



Features



- ❖ Grapple and rock bucket hybrid with an open design provides excellent visibility and allows dirt to fall through.
- ❖ Raised ridge in center of tines and notch near tips secure rocks while digging.
- ❖ Two-cylinder independent grapple with replaceable Teflon® coated bushings providing lubrication at all pivot locations.
- ❖ Tines and side plates made of 3/8" Grade 80 steel and jaws made from 1/2" Grade 50 steel.
- ❖ Corrosion, dent and flake resistant NitroSteel® cylinder rods made in the USA.
- ❖ Fully gusseted tine tips for added strength.
- ❖ Machine specific hydraulic package to completely protect hose routing.

OPTION: Cylinder Guards



Guards protect cylinders from damage.

Skeleton Rock Grapple Specifications

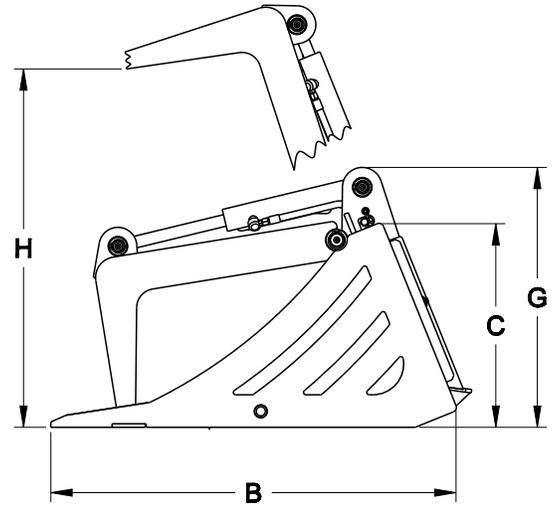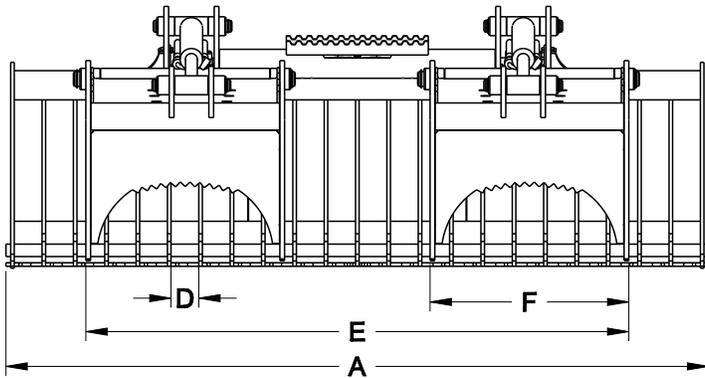

MODEL	SRGV60	SRGV66	SRGV72	SRGV78	SRGV84
(A) Overall Bucket Width (Inches)	61.0	67.6	74.3	80.9	87.5
(B) Bucket Depth (Inches)	42.9				
(C) Bucket Height (Inches)	21.5				
Number of Tines (With Sides)	19	21	23	25	27
(D) Space Between Tines (Inches)	2.9				
Tine and Side Plate Thickness (Inches)	0.375 ¹				
(E) Overall Grapple Width (Inches)	57.4				
(F) Independent Grapple Width (Inches)	21.0				
(G) Height with Grapple Closed (Inches)	27.8				
(H) Grapple Jaw Opening (Inches)	37.0				
Approximate Weight (Pounds)	940	990	1035	1080	1125
Recommended Loader Capacity (Pounds)	Greater than 1500				

¹ Tine Material is Grade 80 Plate (80,000 PSI Minimum Yield Strength).

Additional Info

- 1 9/16" diameter hinge pins.
- 2" bore, 8 3/8" stroke cylinders with 1 1/4" NitroSteel® cylinder rods and 1 1/4" cylinder pins.
- Hoses from grapple to loader and couplers included.

Specifications and designs are subject to change without notice.



Virnig Manufacturing Inc.
 800-648-2408
 attachments@virnigmfg.com
 www.virnigmfg.com