

# Utility Fork Grapple





## Features

- ❖ A durable, versatile one-cylinder grapple.
- ❖ Designed for easy cleanout and bulk material penetration.
- ❖ Replaceable Teflon® coated bushings at hinge locations.
- ❖ Corrosion, dent and flake resistant NitroSteel® cylinder rod made in the USA.
- ❖ Handles a variety of materials including manure, brush, and debris.
- ❖ High tensile strength removable, replaceable teeth.
- ❖ Machine specific hydraulic package to completely protect hose routing.



# Utility Fork Grapple Specifications

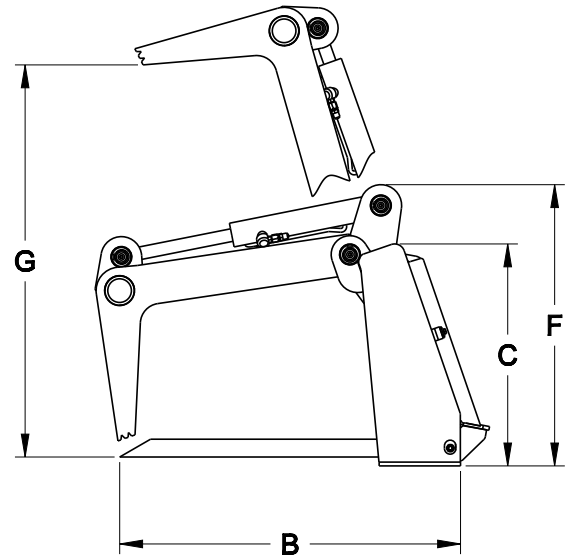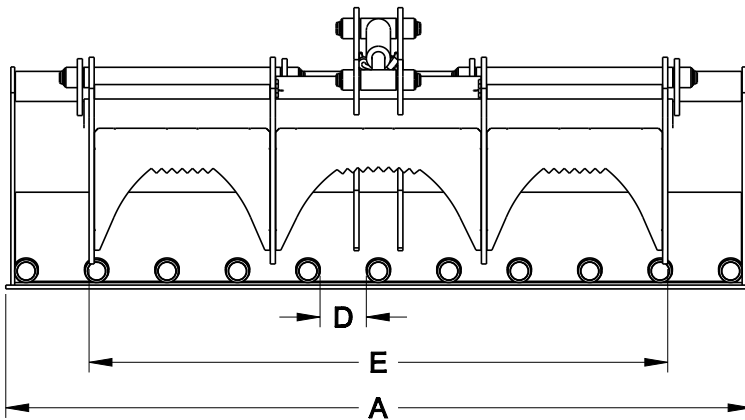

MODEL	MGV160	MGV166	MGV172	MGV178
(A) Overall Bucket Width (Inches)	61.3	67.3	73.3	79.3
(B) Bucket Depth (Inches)	33.5			
(C) Bucket Height (Inches)	21.5			
Number of Teeth	9	10	11	12
(D) Space Between Teeth (Inches)	5.4	5.3	5.2	5.1
Tooth Diameter (Inches)	1.75 <sup>1</sup>			
(E) Overall Grapple Width (Inches)	56.9			
(F) Height with Grapple Closed (Inches)	27.6			
(G) Grapple Jaw Opening (Inches)	38.0			
Approximate Weight (Pounds)	835	860	950	990
Recommended Loader Capacity (Pounds)	Less than 2400			

<sup>1</sup> Tooth Material is 1045 Cold Finished Stress Relieved (CFSR) Round Stock (100,000 PSI Minimum Yield Strength).

## Additional Info

- 1 1/4" diameter hinge pins.
- 1/2" Grade 50 reinforced plate grapple jaw tines (50,000 psi minimum yield strength).
- 2" bore, 8 3/8" stroke cylinders with 1 1/4" rods and 1 1/4" cylinder pins.
- Hoses from grapple to loader and couplers included.

Specifications and designs are subject to change without notice.



**Virnig Manufacturing Inc.**  
800-648-2408  
attachments@virnigmfg.com  
www.virnigmfg.com